

BRIGHT

Bright Premium is a brand
from CORWEI (belonging
to the Nexion group)



Mounting without tire lever? Then the Cheetah is your machine!

The Cheetah is equipped with an Italian-designed, **patented** (de)mounthead. This '**leva la leva**' system is considered by many to be the best in the world and guarantees a smooth and safe assembly of even the most rigid tires, without heavy physical effort.



WATCH
DEMO



BP 889NV/390H/6L

CHEETAH

Specifications

- Clamping range: 11 - 26"
- Rim width: 3 - 15J
- Max. wheel diameter: 1100 mm
- 380V

With professional PCL inflation gauge

NEW!
LEVA LA LEVA SYSTEM

Incl. free Bead Bazooka®



Features

- **PRE-ASSEMBLED / READY TO USE MACHINE**
- Equipped with the heavy duty, **3-function** BP390H helper arm
- 2-speed: normal, full torque and fast, low torque
- (De)mounting without tire lever
- Tilt back post
- Pneumatically locked (de)mounthead
- Foot pedals with stop/move function for easy and fast clamping
- Powerful (2800kg), adjustable bead breaker
- Incl. rim protection for the (de)mounthead, clamping jaws and bead breaker blade
- Incl. Bead Bazooka® and PCL inflation gauge
- Several accessories available

- ✔ Faster and more powerful than a swing arm tire changer
- ✔ Less chance on damaging the tire
- ✔ Ideal for rigid low profile and RUN-FLAT tires
- ✔ Less strain on the tire technician
- ⚠ Only for trained tire fitters
- ⚠ Advanced machine for the tire specialist

BP 889N /390H/6L

TIGER

Specifications

- Clamping range: 11 - 26"
- Rim width: 3 - 15J
- Max. wheel diameter: 1100 mm
- 380V

Features

- **PRE-ASSEMBLED / READY TO USE MACHINE**
- Equipped with the heavy duty, **3-function** BP390H helper arm
- 2-speed: normal, full torque and fast, low torque
- Tilt back post
- Pneumatically locked (de)mounthead
- Powerful (2800kg), adjustable bead breaker
- Foot pedals with stop/move function for easy and fast clamping
- Incl. rim protection for the (de)mounthead, clamping jaws and bead breaker blade
- Incl. tire lever, Bead Bazooka® and PCL inflation gauge
- Several accessories available

Incl. free Bead Bazooka®



- ✔ Faster and more powerful than a swing arm tire changer
- ✔ Less chance on damaging the tire
- ✔ Ideal for rigid low profile and RUN-FLAT tires
- ✔ Easy to use
- ⚠ Relatively heavy strain on the tire fitter when dealing with very rigid tires

BP 889N

TIGER

Specifications

- Clamping range: 11 - 26"
- Rim width: 3 - 15J
- Max. wheel diameter: 1100 mm
- 380V

Features

- 2-speed: normal, full torque and fast, low torque
- Tilt back post
- Pneumatically locked (de)mounthead
- Powerful (2800kg), adjustable bead breaker
- Foot pedals with stop/move function for easy and fast clamping
- Incl. rim protection for the (de)mounthead, clamping jaws and bead breaker blade
- PCL inflation gauge
- Several accessories available

With professional PCL inflation gauge

OPTIONAL: Heavy duty A390H helper arm!



- ✔ Faster and more powerful than a swing arm tire changer
- ✔ Less chance on damaging the tire
- ✔ Easy to use
- ⚠ Relatively heavy strain on the tire fitter when dealing with very rigid tires

					STANDARD	LOW PROFILE	RUN-FLAT		
BP 889N TIGER	✔	✔	✔	✔	✔	✔	✔	✔	✔
BP 889NV CHEETAH	✔	✔	✔	✔	✔	✔	✔	✔	✔

✔ SUITABLE

✔ SUITABLE WHEN USING BRIGHT PREMIUM ACCESSORIES

❖ NOT SUITABLE

ACCESSOIRES

B-C-21-8000100
Motorcycle (de)mounthead
BP810 / BP889



B-C-M-0300000 /
Motorcycle adapter BP889

B-C-M-0400000
Motorcycle adapter BP810



A390H
Helper arm for BP889



B-TB-M-0900000
Motorcycle adapter BP67 / BP68

B-TB-M-0900000L
Motorcycle adapter BP900



BPM 806B

FOX

Specifications

- Clamping range: 6 - 24"
- Rim width: 3 - 12J
- Max. wheel diameter: 960 mm
- 230V single phase

Optional
PL230 helper arm



Features

- Robust machine for the small workshop
- Room saving swing arm
- Foot pedals with stop/move function for easy and fast clamping
- Suitable for motorcycle wheel
- Incl. tire lever, inflation gauge, rim protection for the (de)mount head, clamping jaws and bead breaker blade
- Several accessories available

- ✔ Room saving
- ✔ Ideal for motorbike wheels, low profile tires when using the optional PL230 helper arm
- ✔ Suitable as second- or back-up machine
- ✔ Economical changer, low investment cost
- ✔ 230V plug & play machine

- ❗ Re-positioning of the (de)mounthead when having different rim sizes

BP810
LYNX

Optional
PL230 helper arm



Specifications

- Clamping range: 10 - 23"
- Rim width: 3 - 12J
- Max. wheel diameter: 960 mm
- 230V

Features

- Robust machine for the small workshop
- Room saving swing arm
- Foot pedals with stop/move function for easy and fast clamping
- Suitable for standard wheels
- Incl. tire lever, inflation gauge, rim protection for the (de)mounthead, clamping jaws and bead breaker blade
- Several accessories available


- ✔ Room saving
- ✔ Ideal for standard wheels, low profile tires when using the optional PL230 helper arm
- ✔ Suitable as second- or back-up machine
- ✔ Economical changer, low investment cost
- ✔ 230 volt plug & play machine

- ❗ Re-positioning of the (de)mounthead when having different rim sizes
- ❗ Not suitable for wide RUN-FLAT tires
- ❗ Less fast than a tilt back machine

BP 588S
BULL

Specifications

- Clamping range: 14 - 26"
- Rim width: 3 - 12J
- Max. wheel diameter: 1600 mm
- 230V

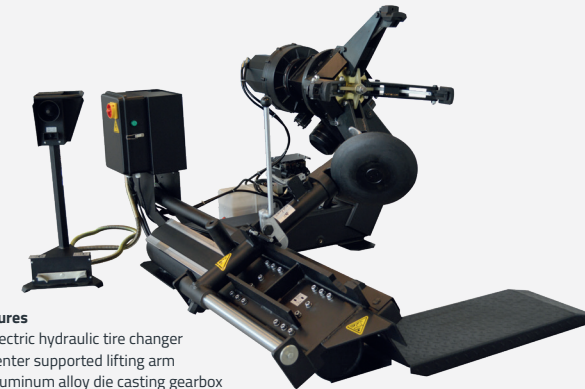

Features

- Electric hydraulic tire changer
- Center supported lifting arm
- Aluminum alloy die casting gearbox
- Including protection cover set for aluminum rims

Specifications

Rim width (max.):	1100mm
Hydraulic pressure:	130-150bar
Bead breaking force:	2800kg
Elec. motor hydr. system:	1,5kW-380v/3Ph-50Hz
Elec. motor main shaft:	1,8kW-380v/3Ph-50H
Noise level:	<75dB
Weight (nett):	561kg

BRIGHT				STANDARD	LOW PROFILE	RUN-FLAT			
BPM 806B FOX	✔	✔	✔	✔	✔	❗	❗	✔	❗
BP810 LYNX	✔	✔	✔	✔	✔	✔	✔	✔	❗
BP 588S BULL	❗	❗	❗	❗	❗	❗	❗	❗	✔

✔ SUITABLE

✔ SUITABLE WHEN USING BRIGHT PREMIUM ACCESSORIES

❗ NOT SUITABLE

ACCESSOIRES

B-C-21-8000100
Motorcycle (de)mounthead
BP810 / BP889



B-C-M-0300000 /
Motorcycle adapter BP889

B-C-M-0400000
Motorcycle adapter BP810



PL230
Helper arm for BP810
and BPM 806B

B-TB-M-0900000
Motorcycle adapter BP67 / BP68

B-TB-M-0900000L
Motorcycle adapter BP900



BP 3020 B ANTILOPE

Specifications

- Clamping range: 9.5 - 28"
- Rim width: 1.5 - 20J
- Max. wheel diameter: 1000 mm
- 230V

Features

- 2D semi-automatic wheel data entry
- Suitable for high performance wheels
- Manual brake function and LED light
- Italian software with 5 programs including ALU Smart
- Quick measuring with the intelligent reading arm



- Automatic distance and rim diameter input (2D)
- LED light and laser pointing for easy positioning of the wheel weights
- Italian software

❌ No pneumatic clamping

BP 67 PLUS HARRIER

Specifications

- Clamping range: 1 - 28"
- Rim width: 1.5 - 20J
- Max. wheel diameter: 1100 mm
- 230V

Features

- 2D semi-automatic wheel data entry
- German Haweka centering (40mm)
- Italian software with 9 programs including ALU Smart
- Manual brake function and LED light
- Workshop all-rounder
- Suitable for high performance wheels
- Quick measuring with the intelligent reading arm



- Automatic distance and rim diameter input (2D)
- Italian software
- LED light
- Haweka centering (shaft, quick nut and cones)
- Manual foot brake function

❌ No 3D
❌ No pneumatic clamping

BP 900B PLUS FALCON

Specifications

- Clamping range: 10- 24"
- Rim width: 1.5 - 20J
- Max. wheel diameter: 1.000 mm

Features

- 1D manual wheel data entry
- German Haweka centering (40mm)
- 5 programs: 3x ALU, motorcycle and standard
- Suitable for standard wheels
- Ideal for the smaller workshop or as back-up machine
- 230V



- Very suitable as second or back-up machine
- Simple machine so demands little experience
- Haweka centering (shaft, quick nut and cones)

❌ Slightly longer balancing time
❌ Less programs compared to the advanced models
❌ Complete manual wheel data input (1D)
❌ No brake function

BP 46 VULTURE

Specifications

- Clamping range: 8 - 28"
- Rim width: 2 - 20J
- Max. wheel diameter: 1250 mm
- 230V

Features

- Italian software including ALU Smart
- 2D balancing machine made for trucks, passenger vehicles and vans
- German Haweka centering
- Inverter technology guarantees efficiency and precision during balancing
- With a low rotation speed, made for fast measurement
- Equipped with a wheel lift, laser indication and LED lighting



- LED light and laser pointing for easy positioning of the wheel weights
- Italian software

❌ No pneumatic clamping

	1	2	3	4	5	6	7	8	9	10	11	12
BP 900 FALCON	Green	Yellow	Green	Red	Red	Red	Red	Red	Red	Red	Red	Green
BP 67 PLUS HARRIER	Green	Yellow	Red	Green	Red	Green	Red	Green	Red	Green	Green	Green
BP 3020 B ANTILOPE	Green	Yellow	Red	Green	Red	Green	Red	Green	Green	Green	Green	Red
BP 46 VULTURE	Green	Red	Red	Green	Red	Green	Red	Green	Green	Green	Green	Green

SYMBOL MEANING

- CAR + SUV/OFF ROAD PROGRAM
- MOTORCYCLE PROGRAM
- MANUAL INPUT WHEEL DATA
- AUTOMATIC INPUT DISTANCE AND DIAMETER RIM
- AUTOMATIC INPUT WHEEL WIDTH
- MANUAL BRAKE FUNCTION

- ◆ YES
 - ◆ NO
 - ◆ SUITABLE WITH THE BRIGHT PREMIUM MOTORCYCLE ADAPTER
- AUTOMATIC BRAKE FUNCTION
 - LED LIGHT
 - LASER POINTER FOR WHEEL WEIGHT POSITIONING
 - HIDDEN WEIGHT/BEHIND SPOKES PROGRAM
 - USB PORT FOR FUTURE UPDATES
 - HAWEKA CENTERING (SHAFT/QUICK NUT/CONES)



Rechtszaad 6 \ 4703 RC Roosendaal \ The Netherlands \ T +31 165 394018 \ TECHNOMARKETINGGROUP.COM

This publication is intended for professionals who are subject to VAT. The prices quoted are exclusive of VAT, transport and installation unless otherwise stated. All data, images, typographical errors reserved. Delivery of limited models while supplies last. Warranty on electrical and pneumatic parts: 2 years (excluding wear parts).

